ARGOPLUS-1200-DD-L10-HV

Argonaut Plus 1200mm Weatherproof Emergency Batten, L10 Nanophosphate, Switchable Colour, Configurable Dual Output, DALI Driver, Zoneworks HIVE



PRODUCT INFORMATION	
Product Code	ARGOPLUS-1200-DD-L10-HV
MIC	AUB00000026201
Product Description	Argonaut Plus 1200mm Weatherproof Emergency Batten, L10 Nanophosphate, Switchable Colour, Configurable Dual Output, DALI Driver, Zoneworks HIVE
Mounting Method	Surface Mount/Suspension
Product Construction'	Recyclable UV Stabilised Polycarbonate (PC) Base with Stainless Steel Clips (SS304)
Diffuser Material	Recyclable UV Stabilised Polycarbonate (PC)
UL Flammability Rating	UL94 - V2 Self-extinguishing Polycarbonate (PC)
Halogen Free	Yes
Dimensions L x W x H	1265mm x 165mm x 106mm
Weight	2.9kg
Ingress Protection (IP) Rating	IP66
Impact Protection (IK) Rating[2]	IK10
Operating Temperature	0°C to 40°C
Supply Voltage	220-240V~ 50Hz
Power Factor	0.90 @ default
Supply Current	165mA +/-20mA
Inrush Current (Max)	17.20A<500µs
Earth Leakage	0.42mA

GENERAL LIGHTING - SPECIFICATION	
Colour Temperature	Switchable between 3000K / 4000K (Default) / 5700K
Colour Rendering Index (CRI)	≥ 85 (4000K), >80 (3000K & 5700K)
LED Colour Consistency	3 SDCM
Short Term Light Modulation (PstLM)	≤ 1.0
Stroboscopic Visibility Measure (SVM)	≤ 0.4
Flicker Free[3]	Yes
Luminaire Output Configuration	Configurable Dual Output
Total Lumen Output	4420 lm (144.0 lm/W) @ default (*refer to next page for details)*
Power Consumption	30.7W@ default (*refer to next page for details)*
Rated LED lifetime[4]	L70/B50 Ta 40 °C: Reported >120,000h, Projected 225,700h L80/B20 Ta 40 °C: Reported >120,000h, Projected 134,600h L90/B10 Ta 40 °C: Reported 63,600h, Projected 63,600h
Driver[5]	LED Driver - TCI DC MAXI JOLLY SVM 65 DALI SLIM


ARGOPLUS-1200-DD-L10-HV

Argonaut Plus 1200mm Weatherproof Emergency Batten, L10 Nanophosphate, Switchable Colour, Configurable Dual Output, DALI Driver, Zoneworks HIVE

EMERGENCY LIGHTING - SPECIFICATION	
Emergency Operating Mode	Sustained
Emergency Testing System	Zoneworks HIVE (RF)
Battery	Lithium Nanophosphate, 3.3V 5000mAh
Battery Configuration	Integral Battery
Battery Charging Method	Intelligent Current Limited Constant Voltage
AS/NZS 2293 Classification	C0=D63 C90=D40

PRODUCT INFORMATION - COMPLIANCE	
Green Building Schemes[6]	Compliant with Green Star Flicker, CRI and MacAdam/SDCM Requirements
Applicable Standards	AS/NZS 3820, AS CISPR 15, AS/NZS 2293.3, AS 60598.2.22
Compliance Marking (RCM)	

REPLACEMENT PARTS	
Part Number	**Description**
1330151	240V Driver
AUM01870090002	Emergency Driver
801-00123	240V LED Strip
1530230	Battery

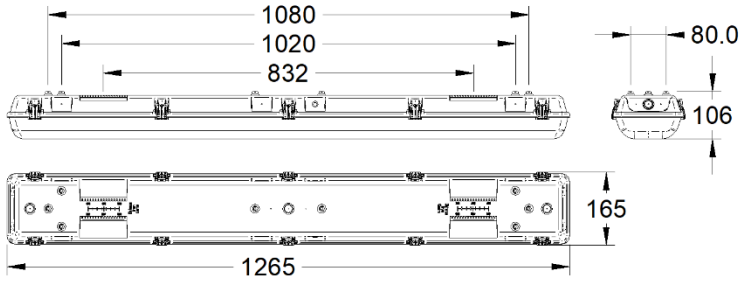

Power Consumption & Lumen Output	Output 2 (650mA)			
	Max Charge, Lamp On	**Standby Charge, Lamp On**	**Standby Charge, Lamp Off**	**Lumen Output**
3000K	33.9W	31.6W	0.7W	4145 lm
4000K (Default)	33.4W	30.7W	0.7W	4420 lm
5700K	33.9W	31.6W	0.7W	4322 lm

Power Consumption & Lumen Output	Output 1 (350mA)			
	Max Charge, Lamp On	**Standby Charge, Lamp On**	**Standby Charge, Lamp Off**	**Lumen Output**
3000K	19.4W	17.1W	0.7W	2432 lm
4000K (Default)	19.8W	16.8W	0.7W	2549 lm
5700K	19.4W	17.5W	0.7W	2533 lm

[1] All plastic materials will degrade under UV exposure over time, resulting in potential yellowing and surface degradation. UV stabilised materials are generally suited to indoor or sheltered environments with indirect UV exposure, while UL 746C – F1 rated UV resistant materials are suitable for outdoor applications with direct exposure to UV and moisture, providing enhanced resistance and reducing the rate of UV-induced ageing.
[2] When luminaire is ceiling mounted using appropriate fixings in accordance with the product instruction.
[3] An LED luminaire is considered flicker-free if the SVM value is ≤ 0.4 and PstLM value is ≤ 1.0.
[4] The projected value has been calculated by extrapolation of the LM80 data using the Energy Star Calculator.
[5] Products fitted with the Mustang Pro combo driver have two active (mains-230V) connections. All operating current is supplied via Lem (Permanent Active, unswitched) only and shall be sized accordingly. Lsw (Switched Active, control only) is a mains-voltage control line and carries no load.
[6] Designed to meet the applicable building scheme requirements at the document version date. For full details, refer to the relevant building scheme specification.

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.